


## AUTO HIGH SPEED LAMINATOR

Indoor photo, outdoor car stickers, graphic images, etc. laminating work

Design and manufacture this professional, strong and durable laminator, aimed at guarantee the user's high quality processing effect and fast finished output everyday.

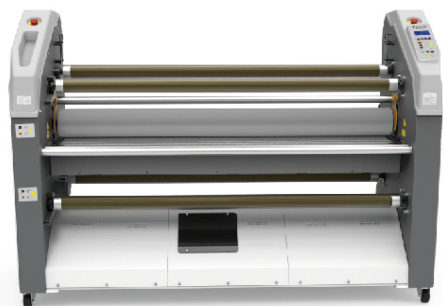

### SUITABLE FOR:

Printed exible materials  
Rigid displays  
Cardboard (packaging)  
Car wrapping  
Floor graphics  
Backlit displays  
Graphics for exhibitions, events  
Banner roll-up & Display pop-up  
Table displays  
Many more.....

- ◎ The top configuration in the industry, single-opening air shaft, super loadbearing, automatic inflation and deflation, automatic unlocking and locking, more secure use
- ◎ Equipped with FAYON latest patented cutting device, which can help remove static electricity generated by the laminating process and avoid cutting wavy and keep the cutting edge neat and clean.




### MACHINE CONFIGURATION:


- ◎ Vacuum-absorbing desktop, assisted by the mounting graphics, convenient for single person independent operation
- ◎ Equipped with front and rear control panel and double foot pedal switch, operation saves time and trouble
- ◎ 1000W servo motor with synchronous wheel & synchronous belt, strong power, linear start and stop, long service life
- ◎ Humanized manual wheel cutter fine-tuning device, the fine-tuning operation is more convenient when the machine is in the state of high-speed lamination




- ◎ Magnetic particle brake tension control, very stable sliding torque, no noise, high precision, wear-resistant, long service life;
- ◎ Equipped with Feiyang's latest patented cutting device, which can help remove static electricity generated by the laminating process and avoid cutting wavy and raw edges;



Liner film laminating



Laminating with cutting



Linerless film laminating



Model	FY-1700SL
Max laminating width	1730mm
Max laminating thickness	50mm
Max Speed	58m/min
Max temp	125℃
Heating	Infrared
Preheating time	10-15min
Roller upgrade	Air cylinder
Power input	0.8-2.8kw/h
Volt	110/220v
Roller material	Silicon
N.W	1000kgs



Liner Guide Rail Way  
Limits The Roller Lifting  
Vertically;



Automatic Clamp device;



Auto-stopFeeding  
Monitored



Power Failure Protection  
Device;



Cutting Position Allows  
Full Directions Adjustment.



Meter Counting  
Function