



64" HEAT-ASSISTED LAMINATOR


The Fayon FY-1600SE is a high-performance laminator for demanding applications. Class-leading features provide ease-of-use and quality results. Laminates, mounts graphics and applies application tape and adhesive. Compatible with all types of cold lamination film.

WHY FY-1600SE?

- Robust construction for heavy use
- Fast load/unload, 64" aluminum shafts
- Heated upper-roller prevents "silvering"
- Pneumatically controlled roller pressure
- Control-panels, front and rear
- High-speeds for long runs
- Versatile: Laminates, encapsulates, mounts & masks

SUITABLE FOR:

- Flexible printed materials
- Pop-up and roll-up banners
- Mounting to rigid materials
- Applying application tape
- Outdoor signage
- Vehicle wraps
- Floor graphics
- Backlit displays



scan for videos
manuals & more

Heavy-duty frame




Edge-trimming & slitter system



Convenient front & rear controls




5 easy-load feed/rewind shafts

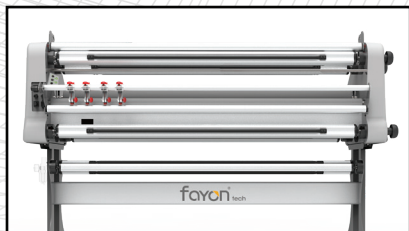


Tension-control on all shafts



Material-sensing & auto-stop

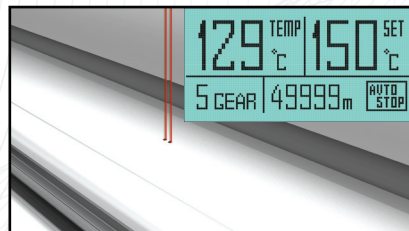

Easy webbing for a variety of laminating uses

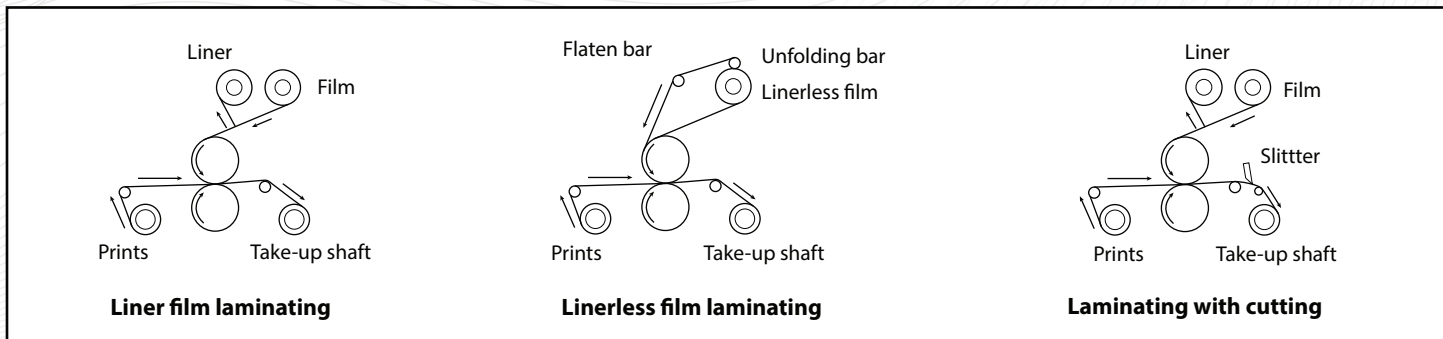

Specifications:

| | |
|--|--------------------------------|
| Max laminating width: | 63.75" (1620mm) |
| Max laminating thickness: | 1.37" (35mm) |
| Max speed: 1 | 49.2ft/min (5m/min) |
| Max temp: | 256 deg F (125 deg C) |
| Heating: | Infrared |
| Preheating time: | 10-15min |
| Roller actuation: | Air Cylinder |
| Roller material: | Silicone |
| Voltage: | 110V |
| Power consumption: | 0.8~2.5kw/h |
| Air Compressor Included?: | Yes |
| Air Requirements (if not using supplied compressor): | 58psi (0.4MPa) |
| Assembled Dimensions (W x D x H): | 80" x 27" x 52" |
| Assembled Weight: | 550lbs |
| Packed dimensions (W x D x H): | 87" x 33" x 33" (wooden crate) |
| Packed weight: | 620lbs |

